

3PU PATENTED

LIBECCIO S1PL FO SR

3R085N

CE EN ISO 20345:2022 S1PL FO SR ESD

SAFETY SANDAL

36-47

3RUN Agility

Safety Sandal, MICRO-tech technical fabric thickness 1,8-2,0 mm. Highly perspiring and abrasion resistant fabric lining. Shoe with refracting fabric insert. Closing with strap.

COMPLETELY METAL FREE SHOE


TOECAP 200J polymeric composite non-thermic according to EN 22568
PL MIDSOLE flexible antiperforation composite fabric according to EN 22568
SOLE 3HYBRID three-densities polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC ANTITORSION** inserted in the sole to give stability on uneven surfaces
MEMORY SOLE extra comfort trimaterial Insole with soft foam cushion Memory cushioning in the heel and body pressure resistant. Breathable, removable, anatomical, absorbent, antistatic and antibacterial and ESD. Footwear meets the requirement in accordance with IEC 61340-4-3:2017 (IEC 61340-5-1:2016) for electrical resistance **ESD**.

FO sole resistance to hydrocarbons

SR sole resistance against slipping

Size 36-47 Shoe weight Tg 42 gr. 490

** The calculated weight excludes laces and insoles.*

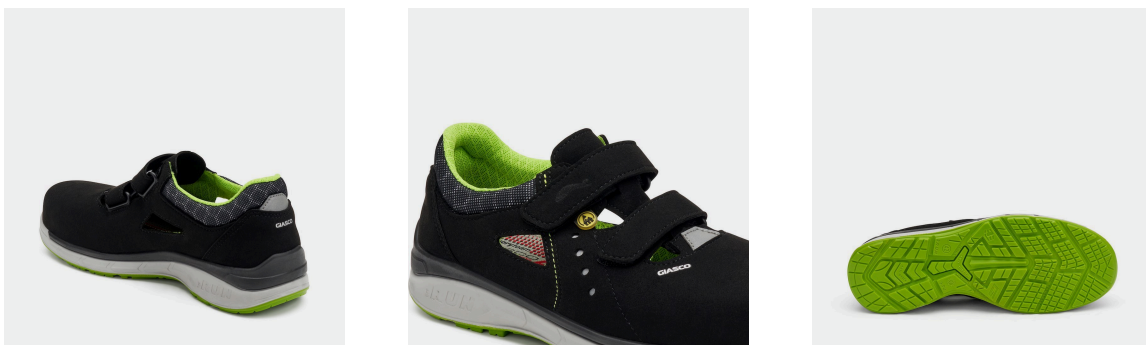

AREAS OF APPLICATION

- Logistics and Light Industry
- Automotive Components
- Metal and Wood Carpentry
- ESD Area

CERTIFICATIONS APPLIED

- PL** Puncture Resistance with Non-Metallic Insert (nail Ø 4.5mm)
- SRC** Slip Resistant Sole
- E** Heel Energy Absorption
- FO** Hydrocarbon Resistance
- DGUV 112-191** DGUV 112-191

TECHNOLOGIES AND MATERIALS

- NO METAL** No metal
- ESD** ESD - Electrostatic Discharge
- NO METAL** Metal-Free
- HIGH VISIBILITY** High Visibility
- AIR** High Breathability
- XL** Mondo Point 11
- EXTRA LIGHT** Extreme Lightness
- SR** Slip Resistance (optional glycerin test)
- 3PU PATENT** Three to be™ - Triple Density Injection
- ANTI TORSION** Anti-Torsion Sole

ANTI-SLIP RESULTS

*after simulation of walking by slight abrasion

Ceramic tile floor with NaLS	Forward Heel (heel slip 7°)	Backward heel (heel slip 7°)	Ceramic tile floor with glycerin	Forward Heel (heel slip 7°)	Backward heel (heel slip 7°)
	≥ 0.31 0.44	≥ 0.36 0.44		≥ 0.19 0.24	≥ 0.22 0.24

↳ PLUS



Three to be™ - Triple Density Injection

Three to Be® - Tripla Densità Iniettata technology represents one of the most advanced results of our R&D efforts. Patented by Giasco, it integrates three entirely polyurethane-injected sole layers to optimize safety shoe performance in terms of comfort, stability, and slip resistance.



Anti-Torsion Sole

The Anti Torsion system uses a thermoplastic shank designed to increase stability on irregular and wet surfaces. Unlike standard shanks, it flexes with the foot's natural motion, reducing the risk of twists and falls. Ideal for outdoor work, especially in construction, where surface control is critical.

↳ SOLE

BRUN Agility

3Run is a sporty and youthful line developed for those who work both indoors and outdoors on regular surfaces. Specifically, the design of this safety shoe is inspired by running shoes, combining soft volumes with sharp lines. The tread, on the other hand, is designed for indoor use. This is made possible by a dense pattern of lugs that together provide excellent slip resistance for this safety shoe.

